
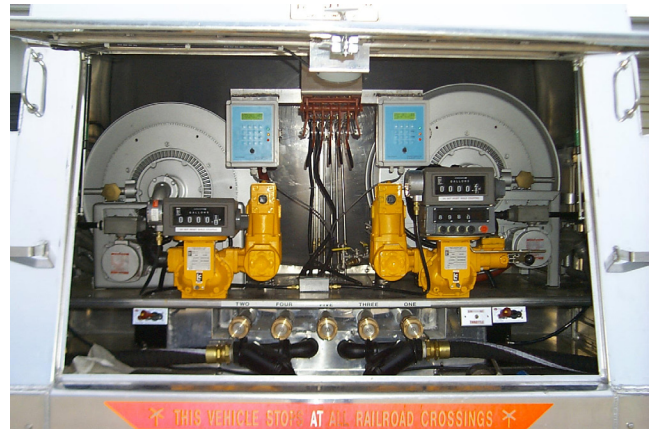


Econotrol™ ET2S12V-T

Explosion Proof Additive Injector for Truck Mounted Applications. Unit is Designed to Inject Fuel Additives While Delivering Fuel to the Customer. This Unit is an Easy To Install 12 Volt DC Additive Injector System.

Model ET2S12V-T1 (0-1200 ML/M), Model ET2S12VT-2 (0-2200 ML/M).

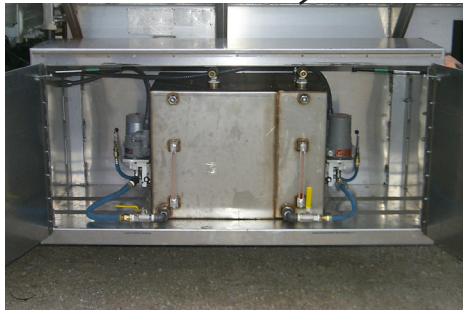

This Popular Injection Unit is Designed to be Mounted on the Truck, runs on 12 VDC, and requires less than 10 amps. This Low Cost, Compact Size, Light weight, and Easy To Install System gets you up and running fast. Packages include all the parts and easy to follow instructions to install this yourself. Operation requires the push of a button when additive is required. A Backlighted Liquid Crystal Display Provides Rate Of Flow Indication and Totals of Both Main Flow and Additive. An On Board Ticket Printer is available which Prints Total Main Flow, Total Additive Flow, Run Time, Customer I.D. Numbers, and Date & Time of Delivery. The Print Signal can also be sent to any PC With Standard Software Import Capability.

*Intelligent
flow systems
that measure up!*

www.economycontrols.com



Economy Controls

C O R P O R A T I O N

9801 Gravois Road

St. Louis, MO 63123-4205 USA

1-800-350-9797

314-544-3700

FLOW COMPUTER

Data Entry: 16 Function sealed Tactile Membrane Keypad with MENU selection and on screen instructions provide easy to understand messages (Audio & Video Annunciation)

Display: Large 4 line x 20 character "Supertwist" Liquid Crystal Display with adjustable contrast

Enclosure: NEMA 4X & 12 Fiberglass reinforced Polyester, UL listed, 13 3/16" H x 11 3/16" W x 6 5/8" D (335mm x 285mm x 168mm) Weight: 10 Lbs. (22.04kg)

Temperature: 0 to 50 deg. C (operating) -25 to +70 deg. C (storage)

STANDARD FEATURES

MENU selection and on screen instructions provide easy to understand messages
 Flow, Calibrate, Inventory, & Alarm MENUS
 Inventory Management Software
 LoFlo Alarm provides missing pulse detection
 Run, Set Point, Rate of Flow, Total, &
 Inventory displays of both Additive and Main Flow while running
 Totalizer, cumulative & resettable
 Calibration on command by entering + or - error
 Socket processor for ease in program upgrades
 Non-Volatile memory retains all data on power loss for ten years
 Available in International Languages
 Two year warranty

This product is classified by Underwriters Laboratories Inc. as to Relays, Power Supply, Enclosure, Wire, motor and Fittings.

Pump: Piston Type Rated 0 - 150 psi.
 Variable Speed Plus Automatic Start / Restart Compensates for any Flow Variation.


Options

Explosion Proof Electrical Computer (See ET3X)
 IP Address for remote management
 In line pressure display/ Low tank level shut down
 Analog and digital inputs and outputs

ACCESSORIES: Control Panels, Flowmeters, Valves, Transmitters, Signal Convertors, Automation Systems & Networks

30 Gallon Tank
 53#s
 30Wx22Hx21D
 Min Fit

12 Gallon Tank
 42#s
 18Wx22Hx21D
 Min Fit

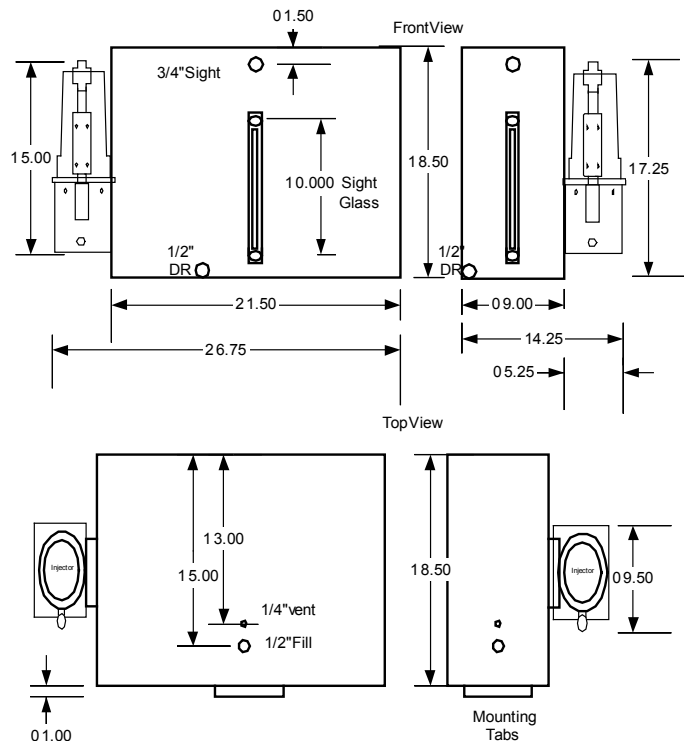

5052 ALuminum Alloy Tank NMMA Approved for pressure, motion, impact & fire resistance. Bathed in acid to eliminate any contamination that might weaken welds. Radius bent corners (not welded) See Drawing ET30-12.2



Injection Unit with 30 Gallon Tank

[Contact Us About This Product](#)

[Visit us at www.economycontrols.com](http://www.economycontrols.com)